

Clamp-On Ground Tester

Models 6416 & 6417

Provides an extra level of safety with new Ground Voltage indication feature

- ▶ Simple and fast clamp-on operation - no leads, no auxiliary rods or spacing requirements
- ▶ Selectable test frequency
- ▶ Differentiates between loop and ground resistance measurements
- ▶ Android™ application provides configuration real-time data review, geolocation and e-mailing of test results
- ▶ Automatic Hold function
- ▶ Displays stored measurements visible in direct sunlight and in dark areas
- ▶ Storage of measurements (Ω , A, V, μ H, alarms, test frequency with time-stamping)



Our products are backed by over 130 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

 **Technical Hotline: (800) 343-1391**
 **www.aemc.com**

 **AEMC[®]**
INSTRUMENTS
CHAUVIN ARNOUX GROUP

Test multi-grounded systems without disconnecting the ground system under test!

The **Ground Resistance Tester Models 6416 and 6417** measure ground rod and grid resistance without the use of auxiliary rods. Clamp-on ground resistance testers can be used in multi-grounded systems without disconnecting the ground system under test or de-energizing them. Models 6416 and 6417 simply clamp around the ground conductor or rod and measure the resistance to ground. By performing measurements on intact ground systems, the user also verifies the quality of the grounding connections and bonds. Resistance and continuity of grounding loops around pads and buildings may also be measured.


Two new features unique to AEMC® are test frequency selection and ground voltage indication. The ability to select the test frequency provides more accurate results in inductive environments. The inductance can also be measured and displayed. Displaying voltage derived from current and resistance measurements provides an extra level of safety for the user, indicating a potential dangerous touch condition. Both models include a current measurement function. The probe's high sensitivity enables measurement of leakage current flowing to ground or circulating in ground loops from 0.2mA to 40A and resistances from 0.01 to 1500Ω.

Both models offer battery life information at power-up and Auto-Off for power management. Additional features are also displayed on the large OLED display to ensure precise measurements. The Buzzer and Auto Power Off features may be disabled from the push-buttons at any time.

Both offer an alarm function and a data storage function. In the Alarm mode, the probe will audibly and visually indicate if the reading is beyond the user programmed set point. The user may have the alarm activate above or below the set point. This alarm feature permits quick field checks where only "pass" or "fail" readings are required.

The data storage function enables the user to conduct field surveys, and to retrieve and analyze the readings at a later time. The alarm settings and stored data are saved when the ground tester is turned off. When using the FREE DataView® software, the 6417 provides Bluetooth transmission to a PC for analysis and report generation.

Now a simple solution to read your measurements

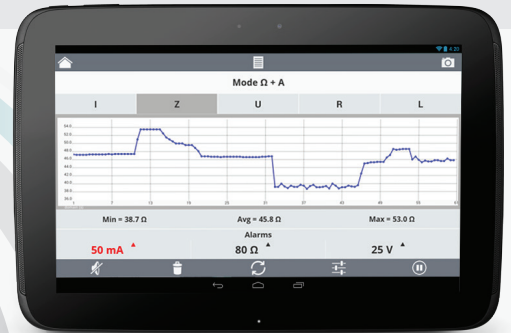

Results, on the Go!



Model 6417 is available with an Android™ application for easy configuration, downloading, displaying of real-time data, printing and e-mailing test results from your mobile device.

With its mobile GPS capability, users are now able to easily locate the site associated with the measurements.




*Model 6417 only

SPECIFICATIONS

Models 6416 & 6417

FEATURES

- ▶ Ground voltage is displayed to alert user to potential unsafe conditions
- ▶ Large multi-function, bright yellow organic display (OLED) usable in all lighting conditions
- ▶ Display in Standard mode (1 screen) or Advanced mode (3 screens)
- ▶ Selectable test frequency improves accuracy in inductive environments
- ▶ Differentiates between loop and ground resistance measurements
- ▶ Data storage (Ω and/or A, with time-stamping)
Model 6416: stores up to 300 measurements
Model 6417: stores up to 2000 measurements
- ▶ Displays stored measurements on the OLED display or by Bluetooth to a PC or the Android based mobile application. (Model 6417)
- ▶ Easy clamp opening by a force compensation trigger system
- ▶ Large jaw design, 1.38" (35mm) accommodating up to 1000kcmil cables
- ▶ Alarm function with adjustable set point and buzzer for quick field checks
- ▶ Rugged Lexan® head and body construction resists breakage
- ▶ Alarm settings and stored memory information saved during shutdown
- ▶ NOISE icon and buzzer alert user to presence of dangerous voltage and current levels
- ▶ Automatic Hold of measurement when jaw is opened

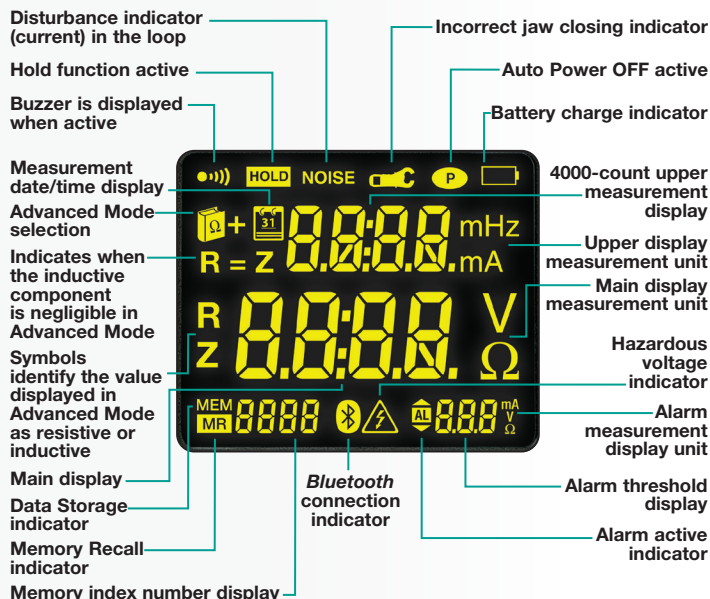

ELECTRICAL

Ground Resistance	Measurement Range	Resolution	Accuracy (% of Reading)
Auto-Ranging 0.01 to 1500 Ω	0.010 to 0.099 Ω	0.001 Ω	$\pm 1.5\% \pm 0.01\Omega$
	0.10 to 0.99 Ω	0.01 Ω	$\pm 1.5\% \pm 0.01\Omega$
	1.0 to 49.9 Ω	0.1 Ω	$\pm 1.5\% \pm 0.1\Omega$
	50.0 to 99.5 Ω	0.5 Ω	$\pm 2\% \pm 0.5\Omega$
	100 to 199 Ω	1 Ω	$\pm 3\% \pm 1\Omega$
	200 to 395 Ω	5 Ω	$\pm 5\% \pm 5\Omega$
	400 to 590 Ω	10 Ω	$\pm 10\% \pm 10\Omega$
	600 to 1150 Ω	50 Ω	20% approx
Current Measurement Auto-Ranging 0.2mA to 40A	1200 to 1500 Ω	50 Ω	25% approx
	0.200 to 0.999mA	1 μ A	$\pm 2\% \pm 50\mu$ A
	1.000 to 2.990mA	10 μ A	$\pm 2\% \pm 50\mu$ A
	3.00 to 9.99mA	100 μ A	$\pm 2\% \pm 100\mu$ A
	10.00 to 29.90mA	1mA	$\pm 2\% \pm 1mA$
	30.0 to 99.9mA	10mA	$\pm 2\% \pm 10mA$
	100.0 to 299.0mA		
	0.300 to 0.990A		
	1.000 to 2.990A		
	3.00 to 39.99A		
Selectable Measurement Frequency	50, 60, 128 or 2083Hz		
Current Measurement Frequency	47 to 800Hz		
Ground Voltage Display	0.1 to 75.0V _{AC}		
Inductance Measurement	10 to 500 μ H		
Power Source	4x1.5V LR6 (AA) Alkaline batteries or 4 NiMH batteries; Battery life: 12 hours, or 14,400 30-second measurements approx		
Data Storage	Model 6416: 300 measurements; Model 6417: 2000 measurements		
Communication	Bluetooth Class 2 - communicates up to 30 ft (Model 6417)		

MECHANICAL

Dimensions	2.16 x 3.74 x 10.31" (55 x 95 x 262mm)
Weight	2.06 lbs (935g) approx. with batteries
Jaw Opening	1.38" (35mm) max
Display	Multi-function, bright yellow organic display (OLED)

ENVIRONMENTAL

Operating Temperature	-4° to 131°F (-20° to 55°C)
Operating Humidity	10% to 90% RH

SAFETY

Safety Rating	EN 61010-1 (Ed. 2 of 2001); 600V CAT IV
---------------	---

PRODUCT INCLUDES



Model 6416 includes a hard carrying case, calibration loop, four 1.5V AA batteries and a user manual.

Model 6417 also includes a Bluetooth USB adapter, quick start guide, and a USB stick with DataView® software and user manual.



ORDERING INFORMATION

Ground Resistance Tester Model 6416 (Clamp-On, Alarm, Memory)
Ground Resistance Tester Model 6417 (Clamp-On, Bluetooth, Alarm, Memory, DataView® software)

CATALOG NO.

Cat. #2141.01
Cat. #2141.02

United States & Canada

Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments

15 Faraday Drive
Dover, NH 03820 USA
Tel (603) 749-6434
Fax (603) 742-2346

Customer Support

Place orders, obtain prices
and delivery options

(800) 343-1391

customerservice@aemc.com

Sales & Marketing Department

sales@aemc.com
marketing@aemc.com

United States & Canada (continued)

Repair & Calibration Service

repair@aemc.com

Technical & Product Application Support

(800) 343-1391

techsupport@aemc.com

South America, Central America, Mexico & the Caribbean

Chauvin Arnoux®, Inc.

d.b.a. AEMC® Instruments

15 Faraday Drive
Dover, NH 03820 USA
export@aemc.com

Australia & New Zealand

Chauvin Arnoux®, Inc.

d.b.a. AEMC® Instruments

15 Faraday Drive
Dover, NH 03820 USA

export@aemc.com

All other countries

Chauvin Arnoux®

12-16 Rue Sarah Bernhardt
92600 Asnières-Sur-Seine, FR
Tel +1 33 1 44 85 45 85
Fax +1 33 1 46 27 73 89
info@chauvin-arnoux.com
www.chauvin-arnoux.com



Family of Products

THE SMART CHOICE

FOR ELECTRICAL TEST & MEASUREMENT INSTRUMENTS

To learn more, visit www.aemc.com

Call the AEMC® Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: (800) 343-1391

AEMC® Instruments • 15 Faraday Dr. • Dover, NH 03820 USA • (800) 343-1391 • Fax (603) 742-2346 • E-mail: sales@aemc.com
Export Department: +1 (603) 749-6434 x520 • Fax +1 (603) 742-2346 • E-mail: export@aemc.com

950.BR-6416-6417_0223 • Printed in the USA

© Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments